



# Product Specification of Ecolite Masonry Block

Lower CO<sup>2</sup>  
Omissions



Barleystone Ecolite Masonry Blocks are the perfect lightweight thermal solution for wall construction. The light weight, easy to handle block can be used for both internal and external wall construction. Our Ecolite Blocks have the perfect solution to heat loss through thermal bridges, such as floor to wall connections.

Manufactured with Ecocem GGBS Cement reduces the level of CO<sup>2</sup> during Ecolite Block production.

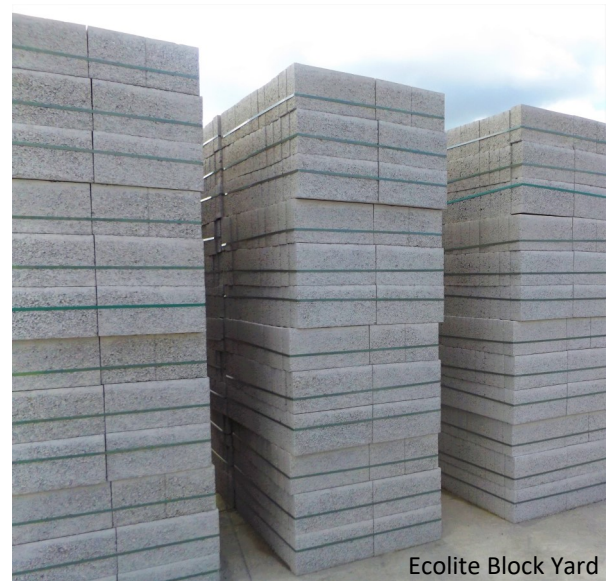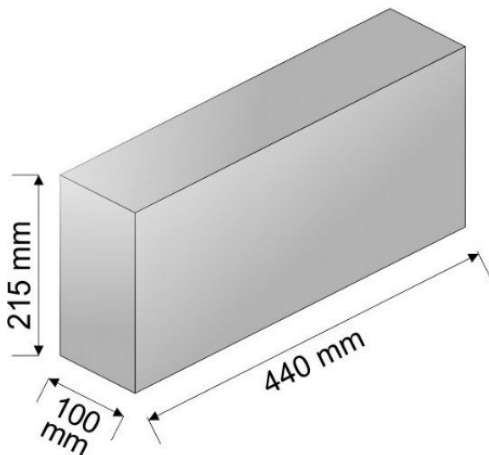

Product	Strength N/mm <sup>2</sup>	Dimensions mm	No. per Strap	Weight per Block
Ecolite Block	7.5	440 X 215 X 100	44	11.5kg

**Raw Materials:** Sand, Stone, Ecocem GGBS Cement

**Manufacturing Process:** Hydraulically Pressed

**Manufacturing Standards:** Manufactured to IS EN 771-3

**Quality Systems:** All products undergo testing to standards of EN ISO 9001 and are covered by CE certification.

**Application:** Please refer to Health & Safety data sheets

**Installation:** Installed to BS 7533

**Performance Criteria:** Strength: >7.5N/mm<sup>2</sup>

Barleystone Paving, Taghart  
South, Shercock,  
Co. Cavan, A81 D667