











Product Specification of Trinity Airtight Masonry

High quality and economical, Trinity Blocks have a fine textured surface, tight dimensional tolerances and sharp, clean arises, they are ready to be painted on.

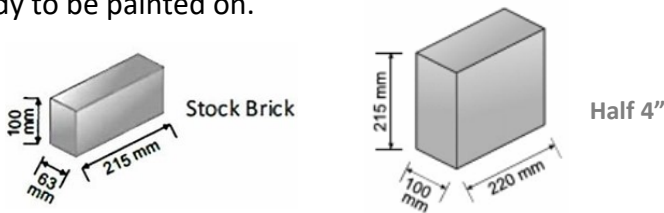

Product	Strength N/mm ²	Dimensions mm	No. per Strap	Weight per KG
4" Solid	13.5 and 23	440 X 215 X 100	24	19.2
4" Hollow	13.5	440 X 215 X 100	24	13
6" Solid	13.5	440 X 215 X 140	16	27
9" Cavity	13.5 and 23	440 X 215 X 215	10	23
Stock Brick	13.5	215 X 100 X 63	56	2.94
Football	13.5 and 23	220 X 215 X 215	20	11.5
6" X 4" Soap Bar	13.5	440 X 107 X 150	32	13.5
4" X 4" Soap Bar	13.5	440 X 107 X 100	48	9
Half 4"	13.5 and 23	220 X 215 X 100	48	9
U-Block	13.5 and 23	440 X 215 X 215	16	24.82
L-Block	13.5	440 X 215 X 172/100	10	23.68

Raw Materials: Sand, Stone, Cement

Manufacturing Process: Hydraulically Pressed

Manufacturing Standards: Manufactured to BS EN 771-3

Quality Systems: All products undergo testing to standards of EN ISO 9001 and are covered by CE and BSRAI certification.

Application: Please refer to Health & Safety data sheets

Installation: Installed to BS 7533-3

Performance Criteria: Strength: >10N/mm² and 20N/mm²

Barleystone Paving, Taghart
South, Shercock,
Co. Cavan, A81 D667